

Electrostatic Discharge (ESD) resilient flooring

RIKETT ASIA HOLDING LTD

ANTISTATIC


Rikett



ANTISTATIC

RESILIENT FLOORING

Rikett
SINCE 1952

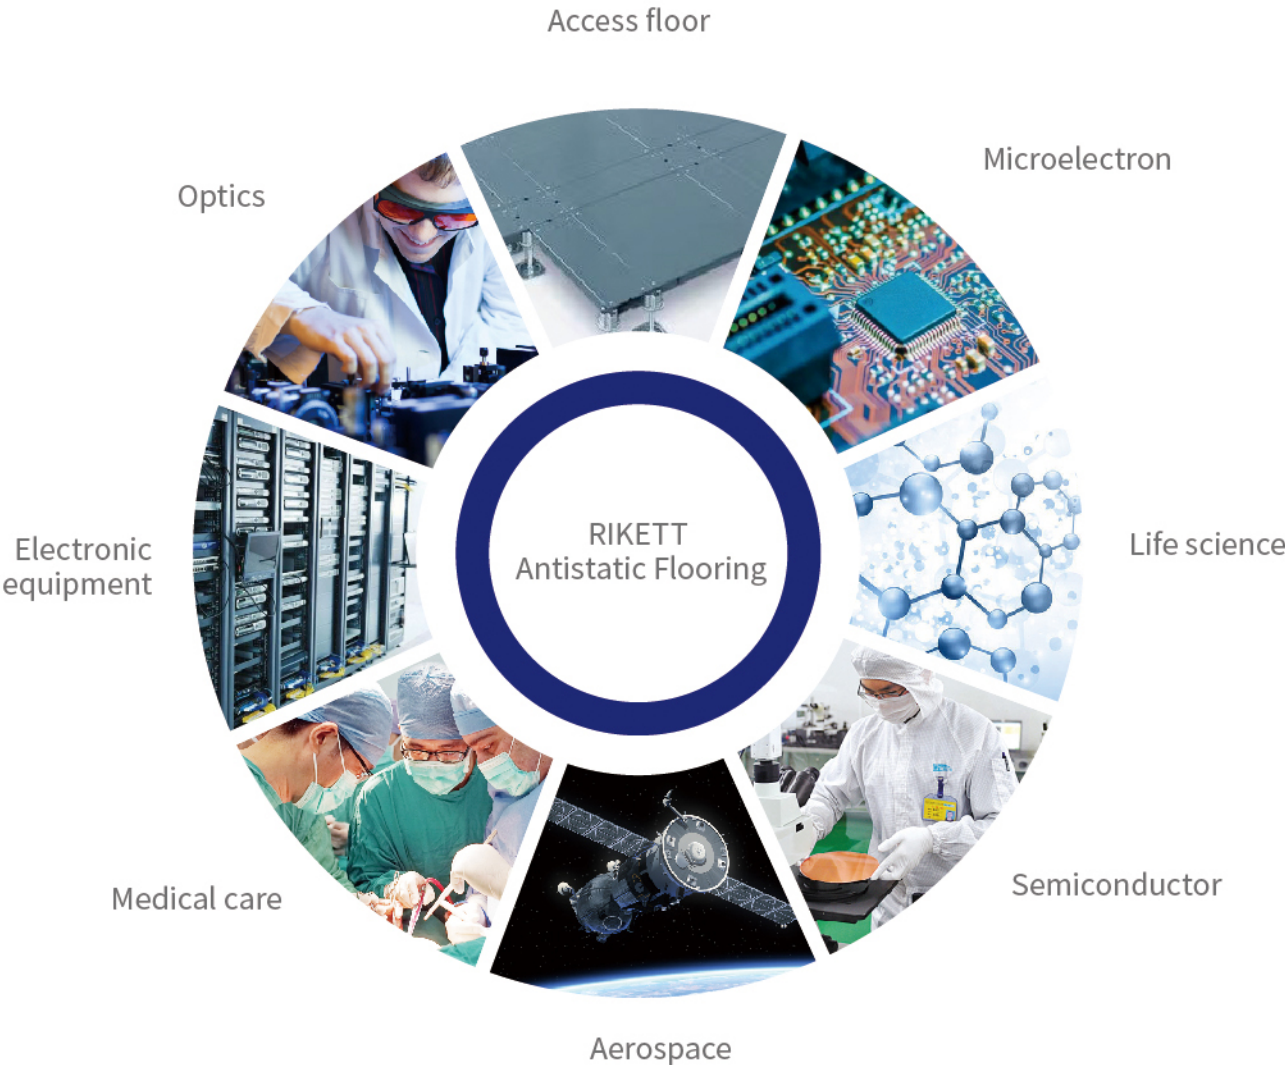

New generation of environmentally friendly plasticizers

At present , it is the only plasticizer suitable for both children's toys and food contact products in the industry .
With the concept of health , safety and environmentally , We are constantly optimizing and improving the raw material of our PVC flooring , using a new generation of environmentally friendly plasticizers-DINCH . the only plasticizer in the industry that does not contain benzene ring structure (phthalate PHT , which is harmful to human health) .



Optimal indoor air quality

TVOC is total of volatile organic compounds , releases mainly from combustion products of fuels and artifact (e.g ., upholstery , paint , furniture , flooring , etc .) . Our products contain low and zero TVOC , at the best level in the industry , ensuring optimal air quality .

ABOUT RIKETT

In 1952 , chemist Mr.Rieber and his sons , founded Rikett in Bergen-Norway on ground of their innovation of quartz flooring .

Rikett Quartz Tile (RQT) , was invented as an advanced replacement to other resilient tiles by eliminating asbestos and carbonates . Since then , for over 70 years , Rikett Quartz Tile (RQT) have been successfully supplied for over 2.0 billion square feet worldwide with under the Rikett trademark .

1952

Rikett was established in Norway ;

1999

Rikett entered USA market ;

2004

Rikett Asia Holding Ltd established,started service to Asian customers ;

2008

Rikett established resilient tile factory in Suzhou , China ;

2014


Rikett established resilient sheet factory in Suzhou , China ;

2019


Rikett established integrated factory in Handan , China .




ESD-7701

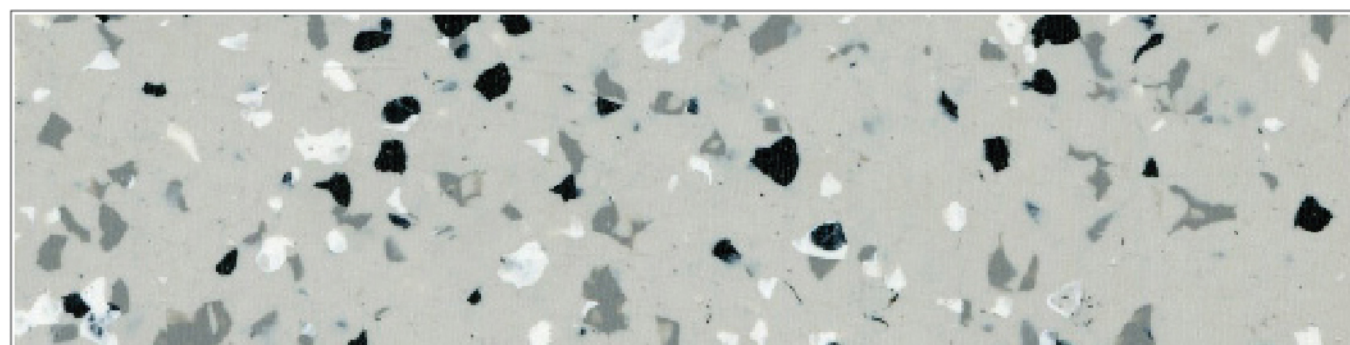


ESD-7702

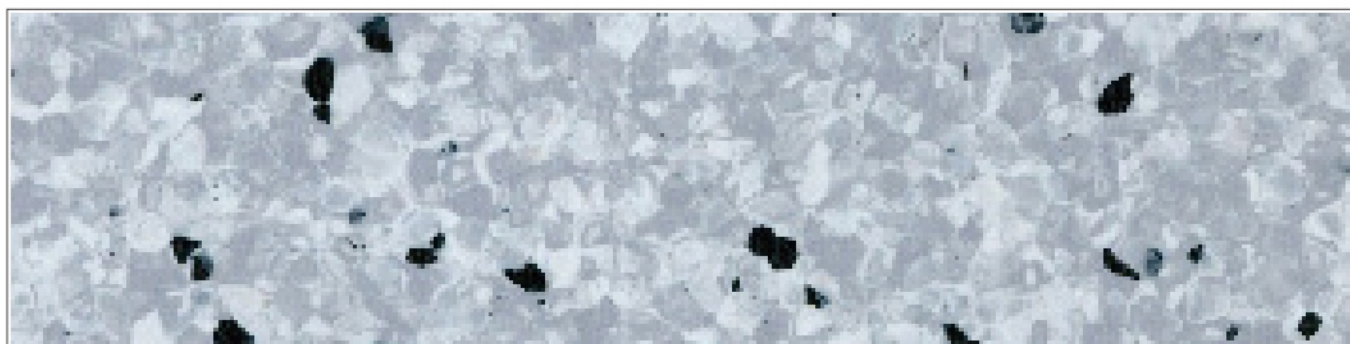


ESD-7703

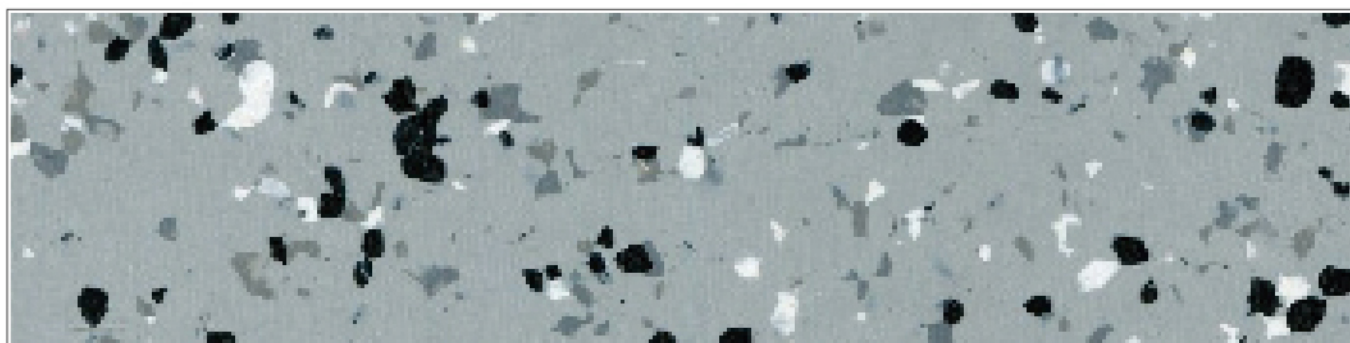


ESD-7704

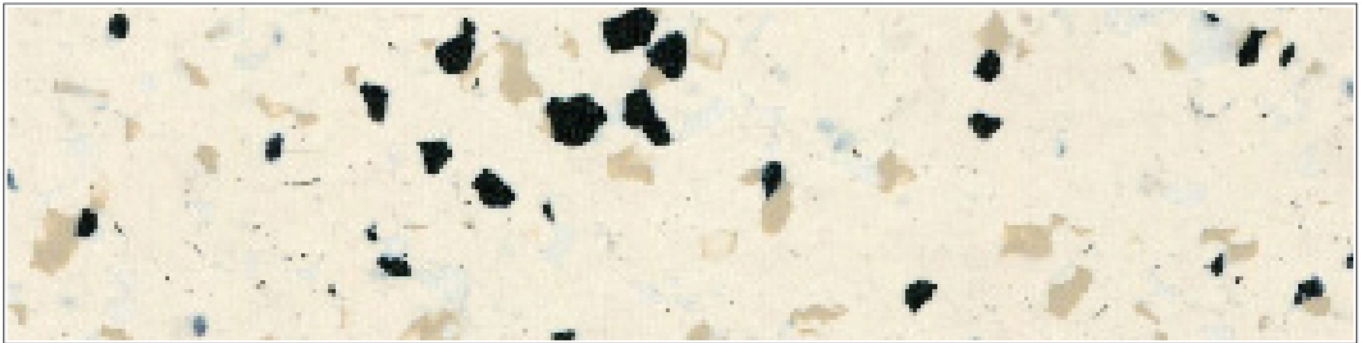


ESD-7705

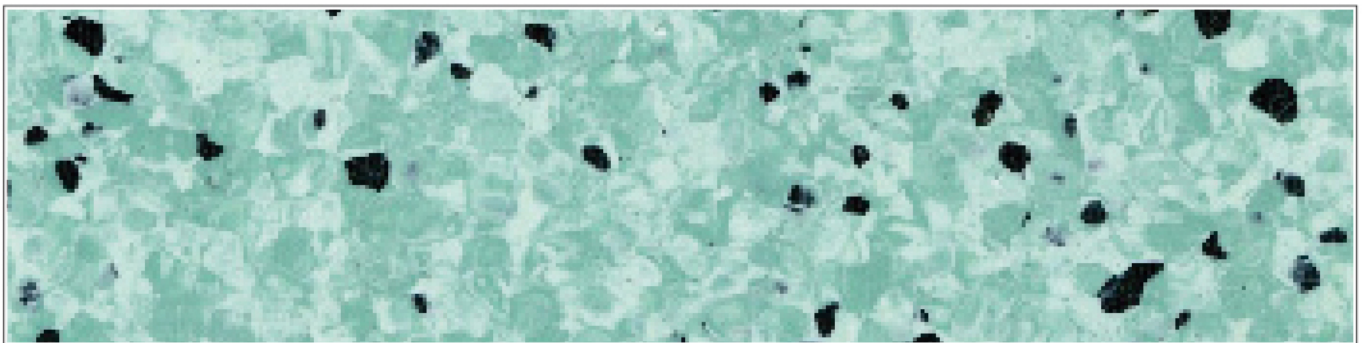

ESD-7706

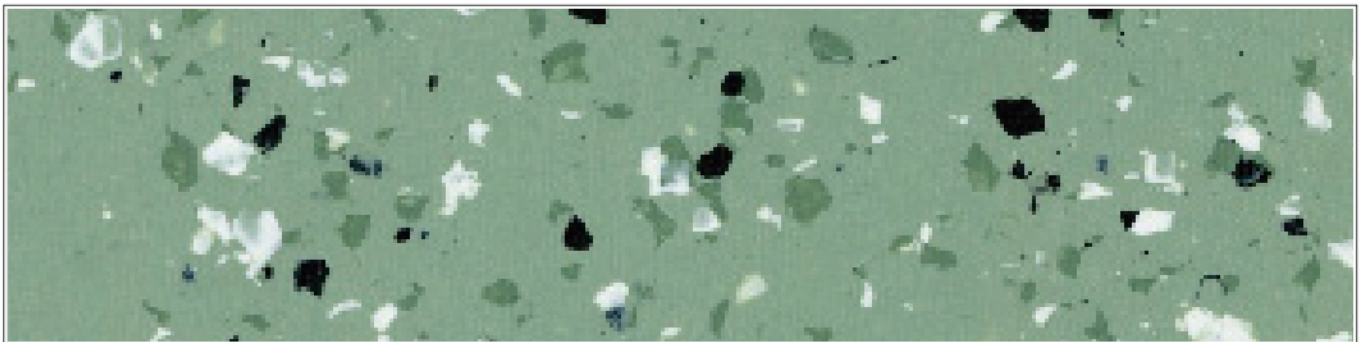


ESD-7707

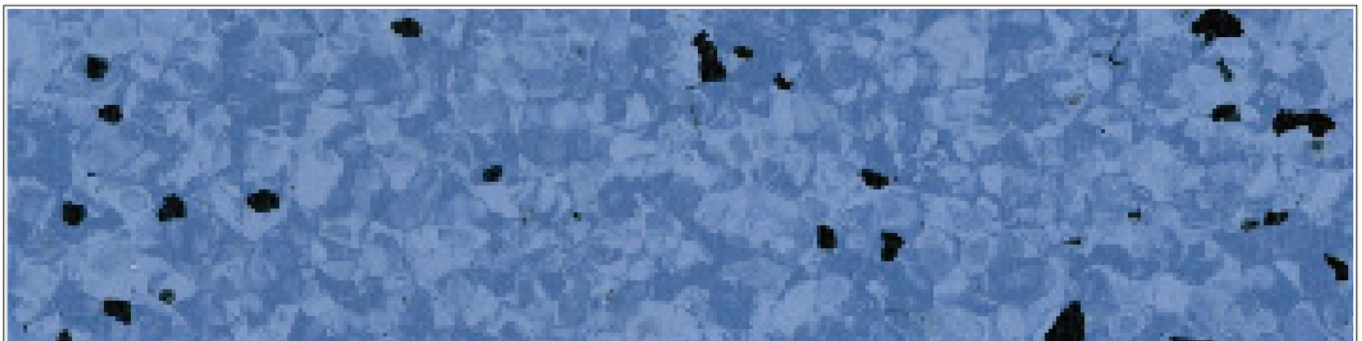


ESD-7708




ESD-5201

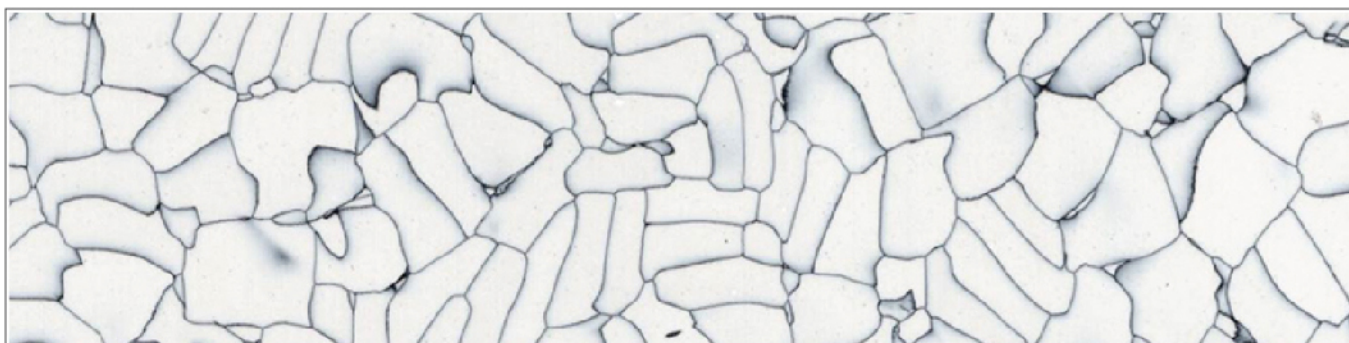

ESD-5203

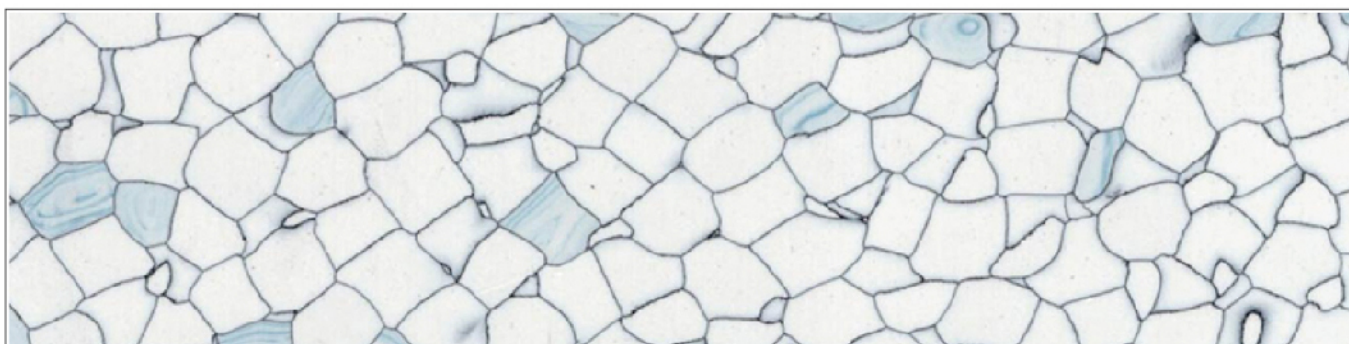


ESD-5204

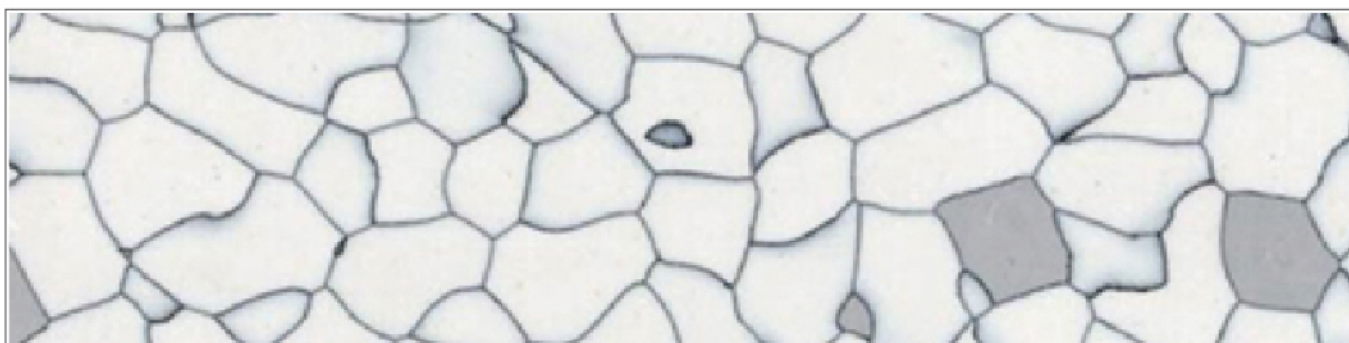

ESD-5208




ESD-5206

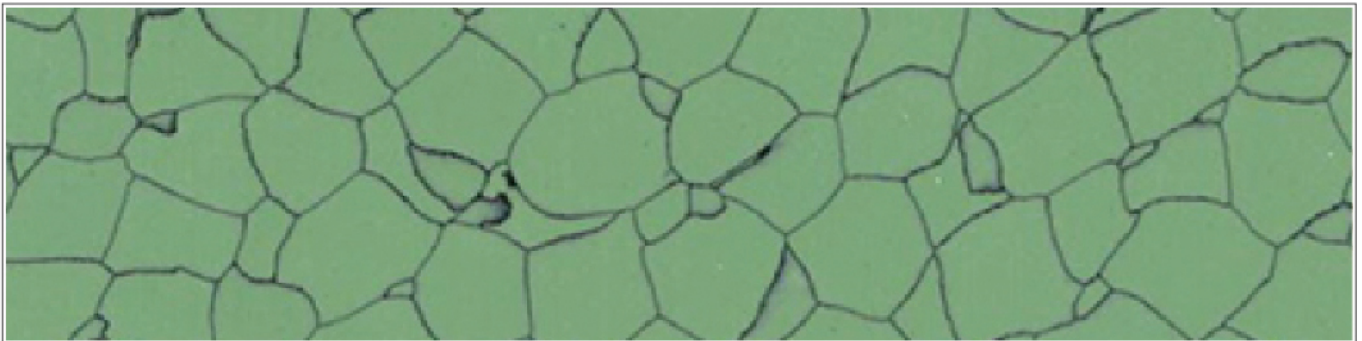

ESD-5207



ESD-5209

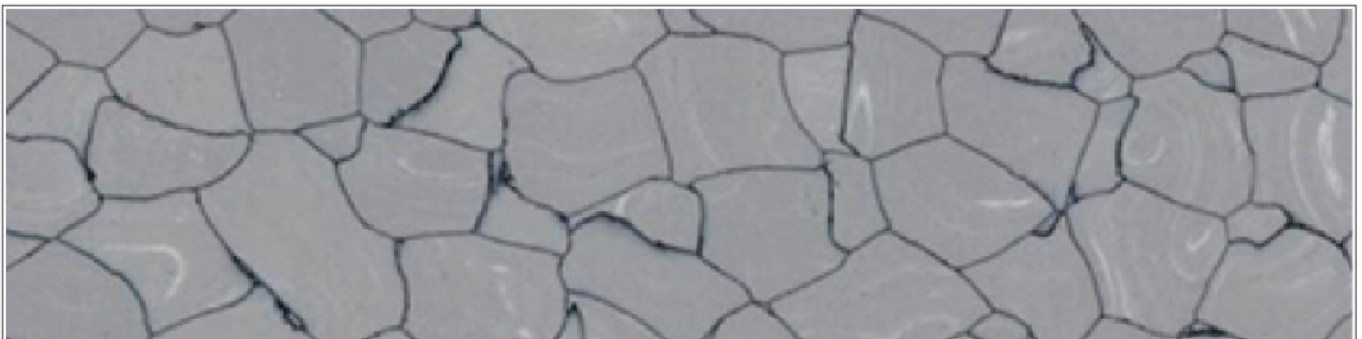

ESD-5205

PERFORMANCES

INSPECTION ITEMS	TEST METHOD	RESULT
Roll dimensions	GB/T 4085-2015	2mx20m
Tile dimensions	GB/T 4085-2015	600mmx600mm
Total thickness	GB/T 11982.2-2015	2.0mm/3.0mm
Surface resistance	SJ/T 11236-2020	Pass
Volume resistance	SJ/T 11236-2020	Pass
Fire resistance	GB 8624-2012	B1
Hazardous substances limit	GB 18586-2001	Pass
Slip resistance	DIN 51130-2014	R9
Residual indentation	GB/T 11982.2-2015	Pass
Colour fastness	GB/T 11982.2-2015	Pass
Rate of dimensional change under heating	GB/T 11982.2-2015	Pass

Professional Advantage



Easy to clean



Chemical resistant agent



Good stability



Compression and tear resistance



Sound insulation and noise reduction



Wear resistance



Antibacterial

- The sample is only used as reference for color selection, not for other purposes. The actual big sample shall prevail.
- The above technical parameters are typical test results obtained under standard laboratory testing conditions for mass production products .The actual products may fluctuate according to the production batches , differentiated needs of customers, and testing institutions .
- If there is a specific requirement for a certain technical parameter , please agree with us the specific details when ordering .
- Products with special surface treatment may have different properties such as skid resistance , chemical resistance and bacteria resistance. Please contact technical personnel for details .



RIKETT PERFORMANCE PANEL (SUZHOU) CO ., LTD
Tel: 400-165-6551 (free)
Add: Taicang , Suzhou , China
Zip: 215400
Web: www.rikett.net.cn

Rikett America Holding , Inc .
Tel: 855-Rikett-7 (855-745-3887) (Toll-Free)
Add: Readington , NJ 08870-0077
Zip: 08870
Web: www.rikett.net

